CARGO TRAILER




FEATURES:

- Cargo Capacity 30,000 lbs. (13607.77 kg)
- 20 to 25 MPH Towing Speed
- Removable Indexing Roller Racks for Either Side or End Loading
- 2-1/2" Diameter Bed Rollers with Sealed Ball Bearings
- All Sealed Bearings
- Towbar Actuated Parking Brakes
- Pallet Stops with Detents to Lock in "Up" Position
- Will Handle Both 96" and 88" Cargo Pallets
- Will Handle One 239" or Two 125" Long Containers
- Main Frame Corners Beveled to Minimize Collision Damage
- Epoxy Powdercoated per Customer Color
- Hot Dip Galvanizing Optional

"FIRST CLASS DOESN'T HAVE TO COST MORE"

CARGO TRAILER

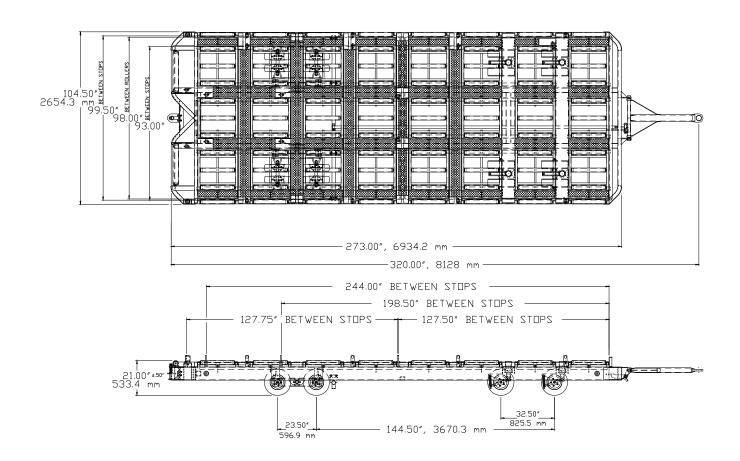

20' Roller Bed Cargo Trailer

SPECIFICATIONS:

WEIGHT: 5720 lbs. (2594.55 kg) TRACK WIDTH: 88" (2235.2 mm)

TIRES: 4.00 x 8 x 16" OD - Solid Rubber.

CASTER KING PIN: 2" Dia., Stressproof, with sealed

Timken thrust bearing.

REAR HITCH: Spring-loaded, E-type - Standard. Other types –

Optional.

WHEEL SPINDLES: 1-3/8" Dia., Stressproof.

RIMS: 9 GA., 5-bolt, 4-1/2" BC, 2-piece - demountable.

REFLECTORS: Per customer specifications.

HUBS: 1-3/8" Dia., with sealed Timken bearings.

PALLET STOPS: Manual, spring loaded, detented.

BED ROLLERS: 2-1/2" Dia., 11 GA., with sealed bearings and

11/16" hex shaft.

LEAD EDGE ROLLERS: Rear End Only: 3-1/2" Dia., with sealed

bearings and 11/16" hex shafts.

RUNNING GEAR: Tandem dual-wheel, spring-cushioned, swivel casters in front. Tandem dual-wheel, rigid casters in rear.