EXTENDABLE CONVEYOR

Single Stage Extendable Conveyor



This conveyor is designed to extend into a trailer or other freight container types to accelerate the transfer of product into, or out of, a handling system or for conveyor access openings. Available in standard sizes or to your specifications.

FEATURES:

- Hand Crank Boom Extension And Retraction
- Hand Crank Will Position BoomStop At Any Extension Length
- **Retracts If Boom Is Hit Or Bumped When Extended**
- Belt Direction: Load Or Unload
- Manual Height Adjustment On Front Stand
- VFD Duty Motorized Pulley
- One Continuous Belt
- Painted Per Customer Color

OPTIONS:

Latest

Model


- Lengths and Widths Available To Your Specifications
- Electrical Powered Boom Extension
- "Air" Powered Boom Extension
- Standard Power Voltages Available
- VFD Speed Controls
- Manual Height Adjustment On Rear Stand

"FIRST CLASS DOESN'T HAVE TO COST MORE"



WASP, Inc. Box 249 ■ Glenwood, MN 56334 (320) 634-5126 FAX (320) 634-5891 www.waspinc.com

EXTENDABLE CONVEYOR

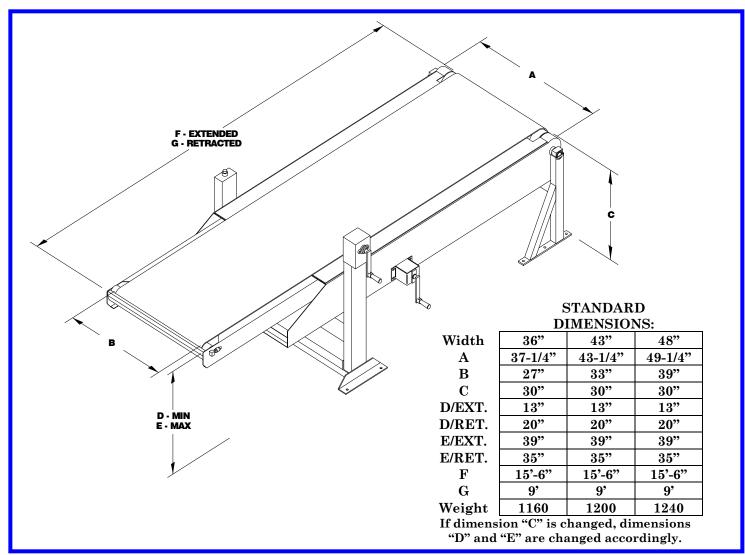

SPECIFICATIONS:

WEIGHT: 1240 Lbs. Approximately

UNIT LENGTH: 108" RetractedUNIT WIDTH: 49-1/4" Overall

BELT: 39" Wide 120 PVC COS x FS

DRIVE DRUM: 7" Diameter Motorized Pulley

END ROLLERS: 3-1/2" Diameter with 1-7/16" Pulley Shafts

IDLER ROLLERS: 2-3/4" Diameter with 1-3/16" Shafts

FRONT STAND: 1-1/4" ACME Lifting Screws

SIDE PANS: 89" LongUNIT LENGTH: 108" Retracted

COMMON BELT SPEEDS: 60 fpm, 80 fpm

BOOM EXTENSION: 80"

REAR STAND: 24" Discharge Minimum or as Required

SIDE PANS: 89" Long



WASP, Inc. Box 249 ■ Glenwood, MN 56334 (320) 634-5126 FAX (320) 634-5891 www.waspinc.com